

Primary Lithium Battery Technology Specification

Customer _____

Part name Primary Lithium Battery

Model No ER26500 9000mAh 3.6V

Serial No _____

Produce No _____

Approved by		Drafted by	Wenfei liang
Checked by		Signed by	Xiaojun Nie
Prepared by		Date	2019-11-26

Company address: 4th Building,Meitai Technology Park,Guanguang
Road,Longhua,Shenzhen,China

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: pkcell@pkcell.net pkcell@pkcell.com

Website: <http://www.pkcell.net> <http://www.pkcell.com>

Product Modified Record List

Revision	Date	Modified Content	Corrected person
A1	2019-11-26		
A2	2019-12-06	把外PVC改为蓝色PVC	Wenfei liang

1.Scope

This specification is applied to the reference battery in this Specification and manufactured by ShenZhen PKCELL Battery Co., Ltd.

2.Product Specification (23±2°C)

No.	Item	General Parameter	Remark
1	Nominal Capacity	9000mAh	Discharge at 3mA to 2.0V
2	Rated Voltage	3.6V	Mean Operation Voltage
3	Max Constant Discharge Current	130mA	—
4	Max Pulse Discharge Current	300mA	—
6	Operating temperature range	-55~85°C	—
7	Avaliable Terminations	S :Standard Terminations	Special Termination are avaliable upon request ⁻³⁻
		T : Solder Tabs	
		P :Axial Pins	

3. Benefits

- High energy density, High voltage, stable during most of the application's lifetime
- Wide range of operating temperature
- Long self-dischager rate (≤1% per year during Storage)
- Long storage life (10 years under room temperature)

4. Main application


- Intelligent instrument and meter
- Memory and standby power, Alarms and security devices
- Automotive electronics, Electronic toll collection
- Millitary devices

5. Warning

ADD: 4th Building, Meitai Technology Park, Guanguang Road, Longhua, Shenzhen, China. 518110

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not use the battery beyond the permitted temperature range.

6. Dimension:

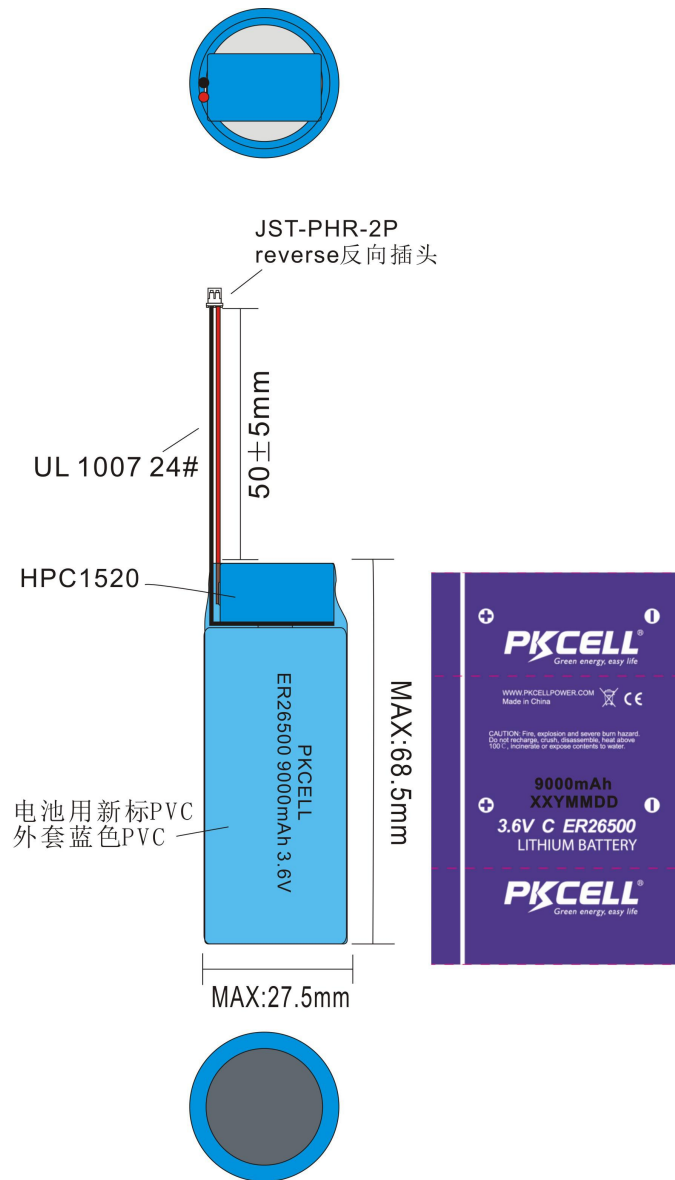

- 4 -

.....END.....